




# 404852 OPTION-EZ3 ANALOG OUT J904

Contains: 404380 circuit board with 403683 harness, analog components and battery; hardware.



### Instructions:

1. Remove back cover of the indicator. Unplug beeper.

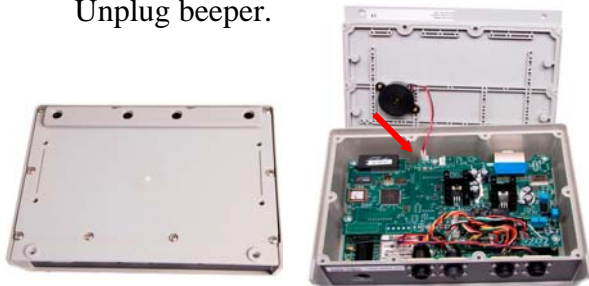


2. Cut holes for J904 connector in the bottom overlay.



3. Attach harness to bottom of housing with screws and screw plate. Check that connector is oriented correctly.



4. Place Option circuit board in housing while connecting P1 to J1 on the Main circuit board.

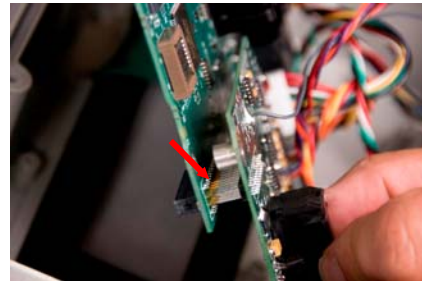

5. Attach to the housing with screws.



6. Reconnect beeper. Match locking tab.



7. Re-attach rear cover
8. Change indicator settings to set the clock and enable the serial port.
9. Enable and calibrate analog output if needed per analog manual.

